


Montaje por racores  
Threaded ports

2VDF04R \* - ▲



2VSF04R \* - ▲






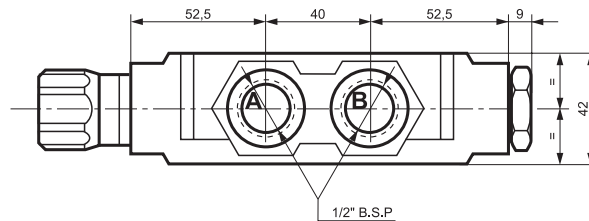


Diagrama: Presión - Caudal  
Diagram: Pressure - Flow rate

P-Q a 23cSt

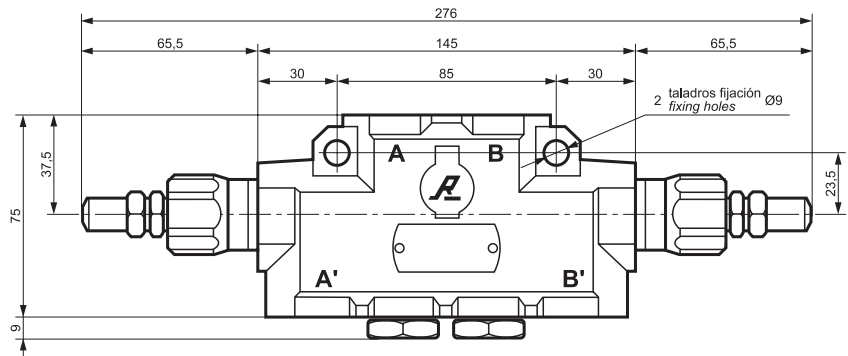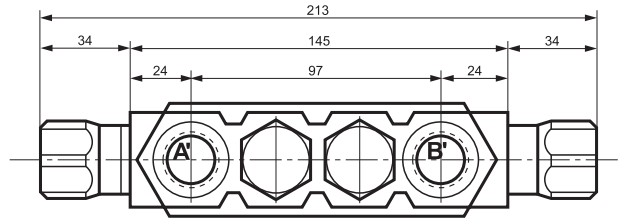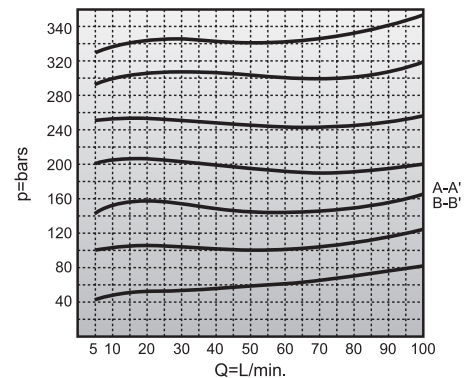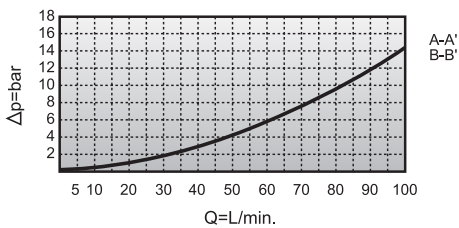

Válvula de frenado Overcentre valve	Tipo regulación / Adjustment		Gama presiones Pressure range bar	Caudal Flow rate L/min.	Presión máx. Max. pressure bar	Gama de viscosidades Viscosity range	Gama de temperaturas Temperature range	Peso Kg Weight Kg.
	Fija Pre-set type	Contratuercas Screw type						
2VDF04R * - ▲	1	11	5-80	80	350	ISO 3448 cat. VG32-VG46	-20° C...+80° C	2,0
	2	12	85-175					
	3	13	180-250					
	4	14	255-350					
2VSF04R * - ▲	1	11	5-80	80	350	ISO 3448 cat. VG32-VG46	-20° C...+80° C	2,0
	2	12	85-175					
	3	13	180-250					
	4	14	255-350					

\* El asterisco de la referencia se sustituirá por el tipo de regulación y el taraje que se desee.  
The asterisk of the part number shall be replaced by the adjustment type and the pressure setting required.

▲ Rel. de pilotaje 2,5  
Pilot ratios 7